



# Pulley MIKY

Lightweight pulley with two attachment holes. Designed for tree climbing application. Suitable for use with Prusik friction knot.

## DESCRIPTION

Two attachment holes with strength 28 kN.

Brass self lubricating bushing.



Anodized aluminum alloy side-walls.

Aluminum alloy sheave for textile ropes and auxiliary cords up to 13mm in diameter.

## KEY FEATURES

- two attachment holes
- self lubricating bushing

## STANDARDS

CE 1019  
EN 12278: 2007

## FEATURES



28 kN



max. 13 mm



105 g





2 YEARS warranty

## MATERIALS



- 90% aluminum alloy
- 8% stainless steel
- 2% brass

## TECHNICAL INFO

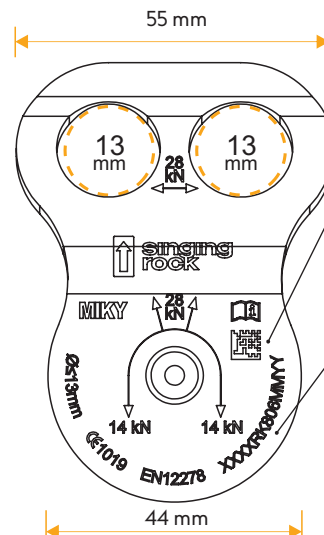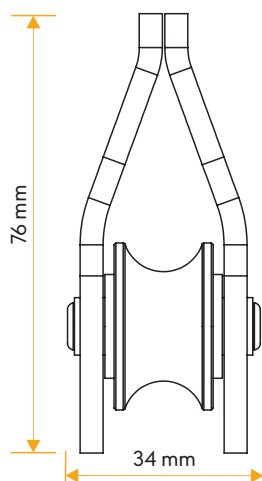

Data Matrix:  
XXXXRK806MMYY

Serial number:  
XXXX: unique number  
Rk806: product code  
MM: month of production  
YY: year of production

MAINTENANCE

Lifetime of the product is not strictly limited by the manufacturer. Depending on the condition of the product and its history it may be necessary to retire it immediately.

If needed it is recommended to lubricate with silicone lube.



beware of chemicals



salty environment



cleaning



drying



silicone lube



read instructions

ACCESSORIES




pulley EXTRA  
RK801BB00



pulley TWIN  
RK802BB00



pulley SMALL  
RK800BB00

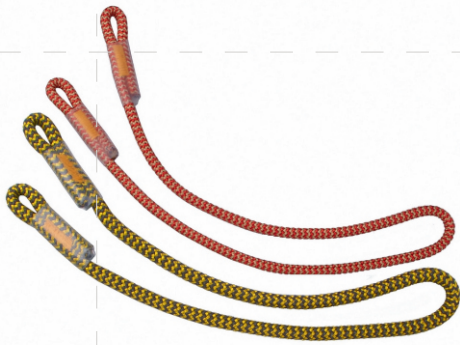

timber accessory cord  
W2608X/W2610X



OXY triple lock  
K0122EE07/K0122BB07

NOTES

Grid of 20 columns and 20 rows of '+' symbols for notes.